




Cooler Master has revived the legendary Hyper 212 EVO with major improvements. Upgraded with an asymmetrical heat pipe design, it now provides 100% RAM clearance for guaranteed compatibility across motherboards. The cooler stature has been shortened as well, making case compatibility even better. Cooler Master's exclusive Direct Contact Technology, paired with the new SickleFlow 120 Fan delivers the ultimate balance of cooling performance and quiet operation. Additionally, the universal brackets have been improved further, making installation simple and hassle free.

HYPER 212 EVO V2



Asymmetrical Design

Asymmetrical heat pipe design delivers maximum RAM compatibility and clearance space




Direct Contact Technology

Direct Contact Technology using 4 copper heat pipe maximize surface area for optimal heat dissipation



SickleFlow 120 Fan

Newly redesigned curved blades with enhanced framework provides optimum airflow, static air-pressure, and noiseless operation

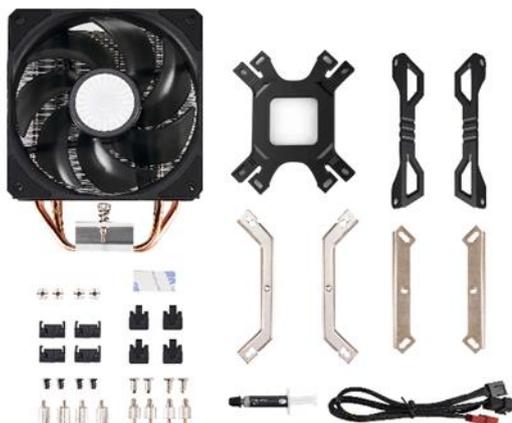

Universal Mounting Kits

Universal brackets including LGA 1700 compatibility simplifies installation.

New SickleFlow 120 Fan - Redesigned curved blades and frame optimizes airflow and static pressure

Asymmetrical 4 Heat Pipe Design - Asymmetrical heat pipe design delivers maximum RAM compatibility and clearance space across various motherboard platforms

Direct Contact Technology - Direct Contact Technology using 4 copper heat pipes deliver exceptional heat dissipation

Precise Combination of Air Flow and Heat sink - Stacked-fin array provides low airflow resistance allowing cooler air flow through the heatsink

Quiet Operation - Performance silent fan with minimized vibrations provides noiseless operation

Snap and Play - Intuitive bracket design allows for a hassle free installation process

SPECIFICATIONS

Product Name	Hyper 212 EVO V2	
Product Number	RR-2V2E-18PK-R2	
Exterior Color	Silver	
CPU Socket	Intel® LGA 1700 / 1200 / 2066 / 2011-v3 / 2011 / 1156 / 1155 / 1151 / 1150	
	AMD® AM4 / AM3+ / AM3 / AM2+ / AM2 / FM2+ / FM2 / FM1	
Dimensions	120 x 80 x 154 mm (4.7 x 3.1 x 6.1 inch)	
Heat Sink Material	4 Heat Pipes / Direct Contact/ Aluminum Fins	
Fan	Dimensions (L x W x H)	120 x 120 x 25 mm (4.7 x 4.7 x 1 inch)
	Quantity (pcs)	1 PCS
	Speed (RPM)	650 ~ 1800 RPM ± 5%
	Airflow (CFM)	62 CFM (Max)
	Noise Level (dBA)	8 ~ 27 dB(A)
	Pressure (mmH2O)	2.5 mmH ₂ O (Max)
	MTTF	>160,000 hours
	Power Connector	4-Pin (PWM)
	Rated Voltage (VDC)	12 VDC
	Rated Current (A)	0.15 A
	Safety Current	0.37 A
	Power Consumption	1.8 W
	Warranty	2 years

PACKING INFORMATION

EAN code	4719512123478	Cont.	W/ Pallet	Carton/ Pallet	W/O Pallet
UPC code	884102095795	20'	4200		N/A
Net weight	1.19kg	40'	8400		N/A
Gross weight	1.45kg	40 HQ	9600		N/A
Package dimension (L x W X H)	15.7x 9.9 x 22.8cm				
Carton dimension (L x W x H)	53.0x33.5 x 26.0cm				
Units/CTN	10				